

Brief Description

This led linear high bay is a brand new replacement solution for fluorescent linear high bay in warehouse, garage locations and any other commercial and industrial applications.

Advantage

Lumen Output more than 120 lumens per watt

CRI more than 80

Epend dimmable driver.

Input voltage can be AC100-277V

Reduces energy consumption up to 60%.

5 years lifespan

Surface mounting installation

Suitable for damp location


UL and DLC

Glass-free

Performance Data

Model	Wattage	Lumens	LxWxD inch
ZY-H2-110W XDZ	110	13700	23.8"x12.6"x3.62"
ZY-H5-160W XDZ	160	19200	23.8"x17.3"x3.62"
ZY-H3-220W XDZ	220	26700	45.9"x12.6"x3.62"
ZY-H6-320W XDZ	320	39300	45.9"x17.3"x3.62"

Dimming Connection

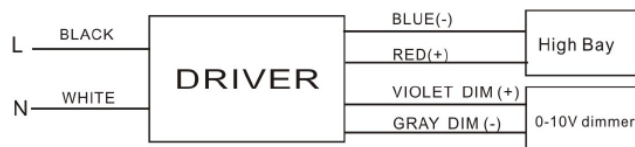

Ordering Guide

ZY	Hx	110W/160W/220W/320W	XDZ/XNZ
Tube Code	Housing Type	Wattage	Dimmable/ Non Dimmable




Mounting Option

V-Clips for dual point chain or cable hanging (Standard)



Installation Clips

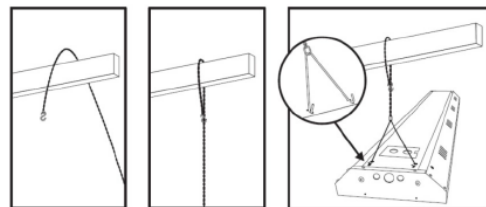

Pendant hanger

